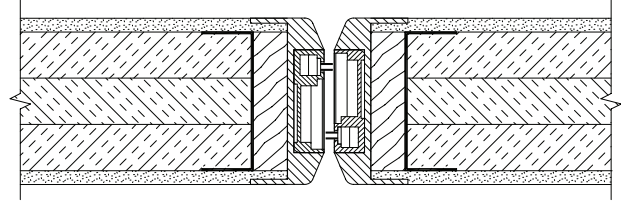
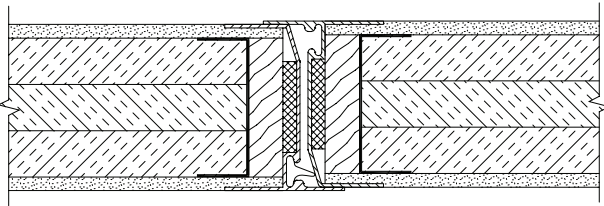


DESCRIPTION

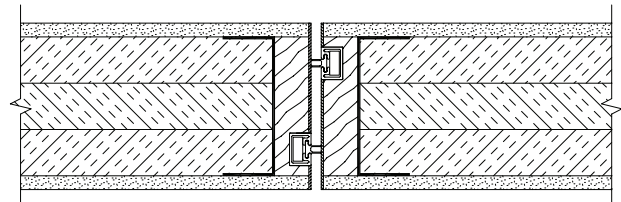
Fire rated meeting stiles suitable for Pyropanel fire doors for up to 4 hours of fire rating.


**Aluminium bull nosed meeting stile
(Up to 3 hours of fire rating)**

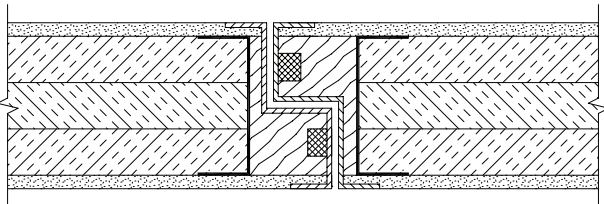
Meeting stile detail of anodised aluminium suitable for single acting and double acting fire doors for up to 3 hours of fire rating. Meeting stile incorporates the Pyroseal fin seal.


**Aluminium J-Section meeting stile
(Up to 4 hours of fire rating)**

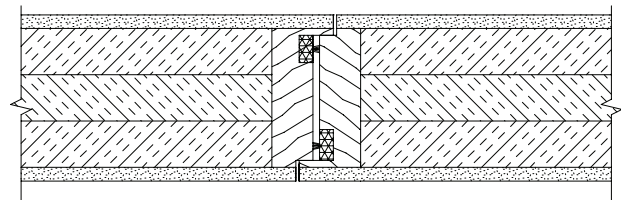
Standard meeting stile detail of anodised aluminium interlocking J-Section fitted to each leaf. Smoke seals to both leaves available as optional extra. Meeting stile is approved for Life Safety Doors (certified smoke doors). Active leaf should be nominated in specification when ordering.


**Square edge meeting stile
(Up to 1 hour of fire rating)**

Meeting stile detail of with Raven RP76 seals and veneered edge strip to enable the meeting stiles to look like solid timber.


**Aluminium rebated meeting stile
(Up to 4 hours of fire rating)**

Meeting stile detail of anodised aluminium suitable for doors with up to 4 hours of fire rating.


**Timber double rebated meeting stile
(Up to 1 hour of fire rating)**

Timber meeting stile with double rebated detail and integrated smoke seals.

Pyropanel Developments Pty Ltd

Unit 1, 97 Lewis Rd, Wantirna South, Vic 3152

Ph: (03) 9837 8500 Fax: (03) 9837 8550

Email: sales@pyropanel.com.au

Web: www.pyropanel.com.au

Distributed by:
Holland Fire Doors & Windows

23 Saggart Field Rd, Minto, NSW, 2566

Ph: 9603 8500

Email: sales@hollandfiredoors.com.au