

PY-BS1 Bottom Seal (Fire/Smoke/Acoustic)

DESCRIPTION


A high performance automatic bottom seal that is fully-morticed in the bottom of the door leaf, which provides protection against fire, smoke and sound transmission.

APPLICATIONS


Unit entry doors, fire doors, offices, schools, hotels, hostels, nursing homes, hospitals, factories or any application that requires protection against fire/smoke/sound transmission.

FEATURES

- Acoustic Rating: up to 40 Rw.
- Fire Rating: 1hr with Pyropanel AS-39-PAFD fire rated acoustic doorset (tested to AS1530.4).
- Smoke: meets NCC requirements for a "smoke door". (Not tested to AS1530.7).
- Not visible when door is closed.
- Suits gaps between 6-13mm.
- Unique patented design provides excellent acoustic performance.
- Innovative mechanism provides a level of intruder protection by resisting upward movement of seal when door is in closed position.



PY-BS1

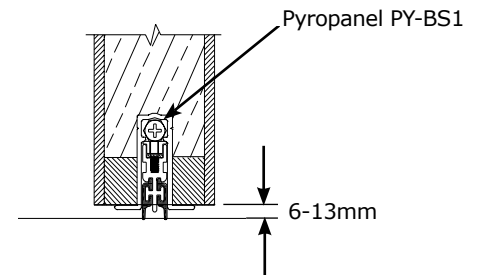

Model	Door Width
PY-BS1-0820	820
PY-BS1-0920	920
PY-BS1-1020	1020
PY-BS1-1200	1200

HOW TO SPECIFY

Eg, Bottom door seal to be a Pyropanel PY-BS1-0920.*

**Denotes example - delete or change or specify as required.*

Pyropanel Developments Pty Ltd

235 Huntingdale Road, Oakleigh, Vic 3166
 Ph: **(03) 9837 8500** Fax: (03) 9837 8550
 Email: sales@pyropanel.com.au
 Web: www.pyropanel.com.au

Distributed by:

Holland Fire Doors & Windows
 23 Saggart Field Rd, Minto, NSW, 2566
 Ph: **9603 8500**
 Email: sales@hollandfiredoors.com.au

Pyropanel Developments has a policy of continuous improvement and reserves the right to change methods and specifications without notice.
 Note: *The Tech Sheet is an uncontrolled document, If printed please refer to the Tech-Sheet on the website to check if this document is valid.*