

ACCESSORIES

Door Closer - MD1300SIL

DESCRIPTION

Fire Rated adjustable door closer. Certified and tested on fire doors for up to 4 hours.

APPLICATIONS

Suitable for fire doors and standard doors used in residential and commercial applications.

FEATURES

- Tested and certified to Australian Standards
- 2 to 4 power adjustable
- Adjustable back check
- Adjustable latching speed
- Adjustable closing speed
- Overload protection
- Non-Handed
- Standard and Parallel arm brackets included
- Easy to install




OPTIONAL EXTRAS

- Available with slide track upon request.

INSTALLATION OPTIONS



1. Standard Arm

Closer installed on pull side of door. This mounting position permits opening of 180°.

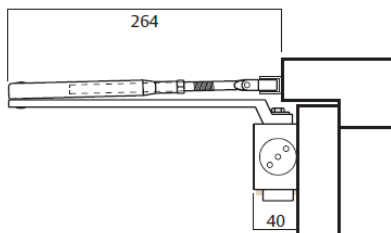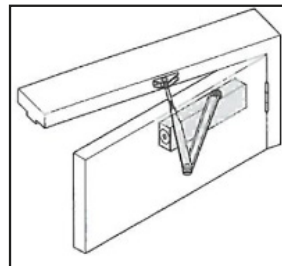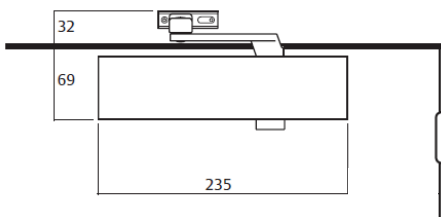



2. Parallel Arm

Closer installed on push side of door. This mounting position permits opening of 180°.

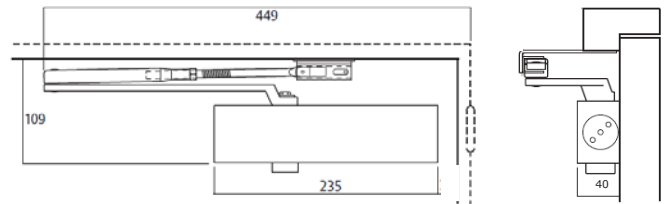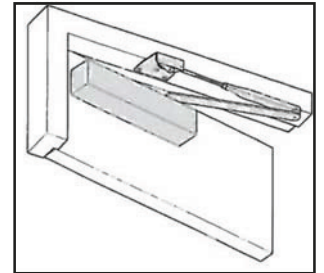

3. Frame Mounting

Closer installed on push side of door and frame head where conditions do not allow parallel mounting.

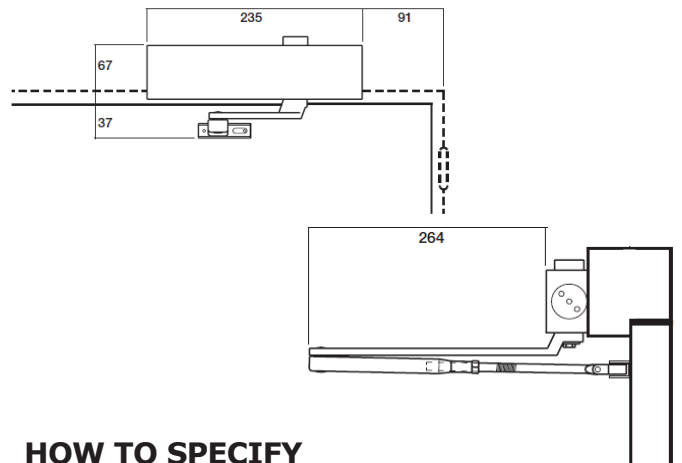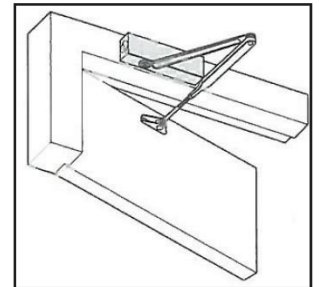

HOW TO SPECIFY

Eg, "Pyropanel MD1300SIL Fire Rated closer"



Pyropanel Developments Pty Ltd

235 Huntingdale Rd, Oakleigh, Vic 3166
 Ph: (03) 9837 8500 Fax: (03) 9837 8550
 Email: sales@pyropanel.com.au
 Web: www.pyropanel.com.au

Distributed by:

Holland Fire Doors & Windows

23 Saggart Field Rd, Minto, NSW, 2566
 Ph: 9603 8500
 Email: sales@hollandfiredoors.com.au